
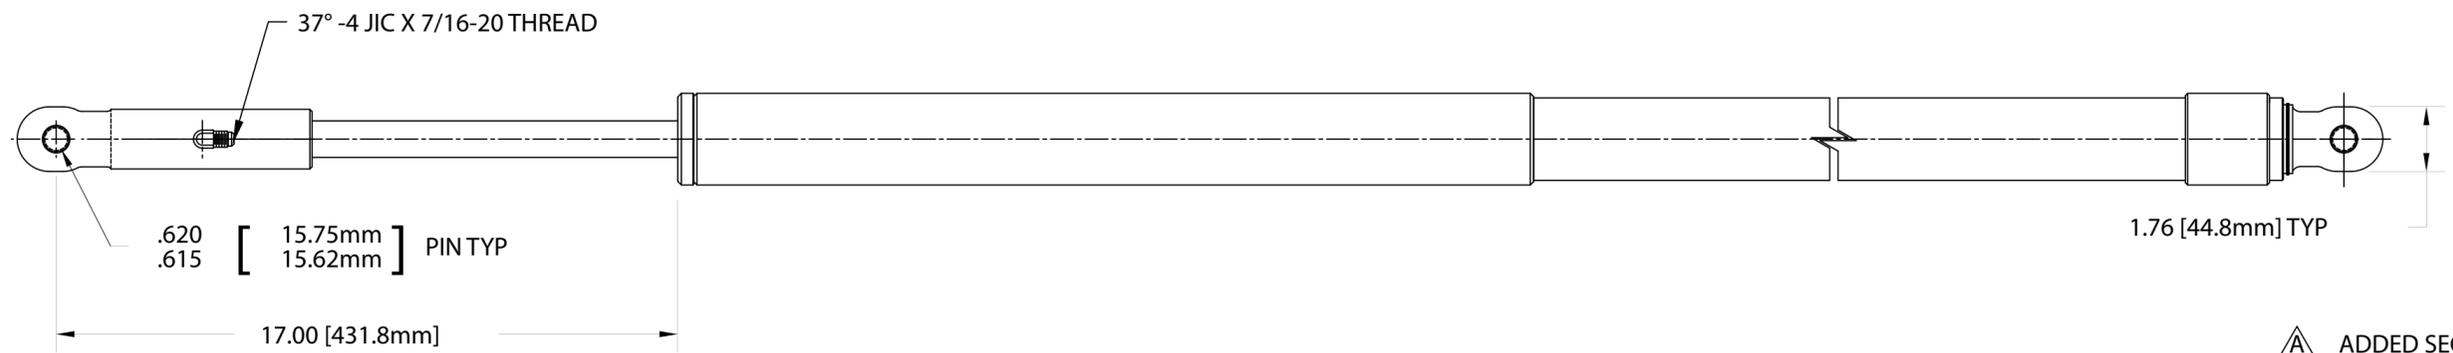


MAXIMUM PULL FORCE = 12,200 LBS (5530 KG) @ 5,000 PSI
 STROKE: 10 IN (254.0MM)
 RETURN FORCE: 1940 LBS (880 KG)
 MINIMUM AVAILABLE PCLC: 58 IN (1473 MM)
 MAXIMUM AVAILABLE PCLC: 104 IN (2642 MM)

TOLERANCES: 0.XX = ±0.010
 0.XXX = ±0.005
 FRACTIONS = ±1/64
 ANGLES = ±1/2°

REVISIONS				CHK INIT.
DATE	INIT.	#	ECO	
07/25/12	CJW	A		

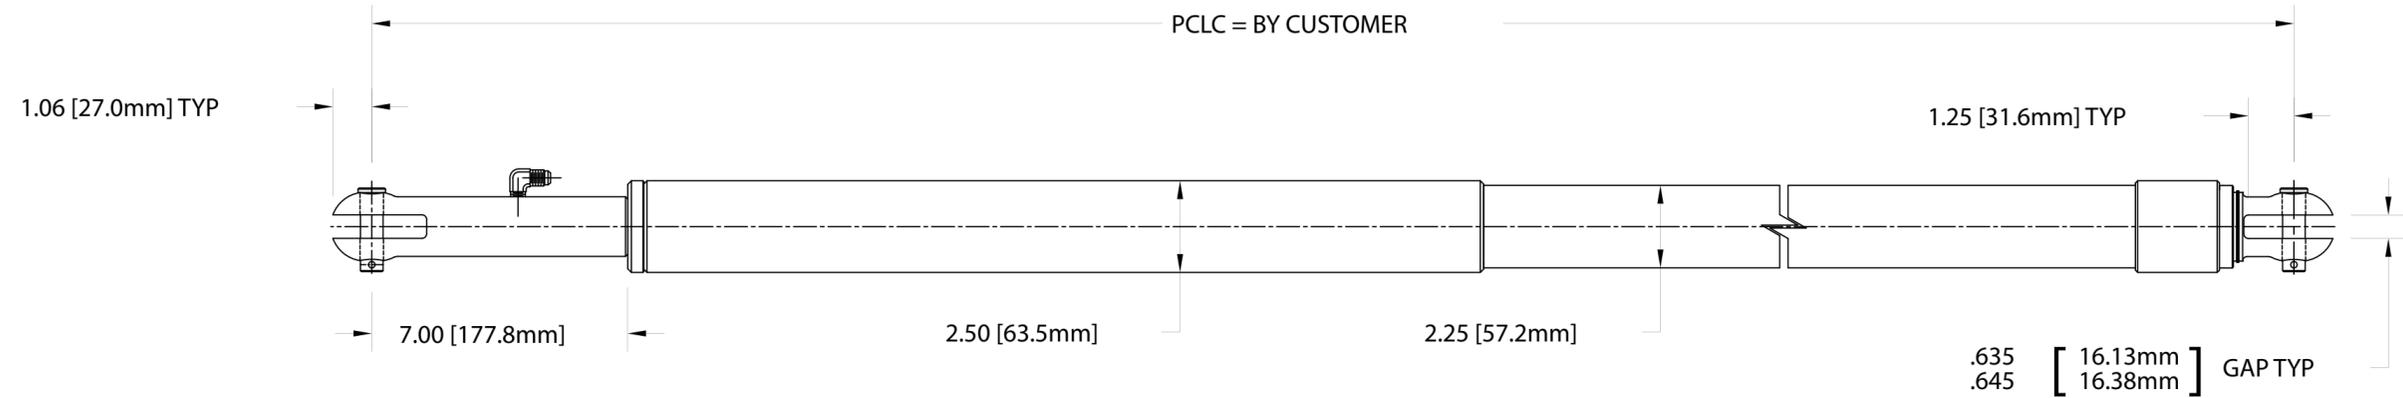

\triangle ADDED SECOND VIEW

-22 VANG ASSEMBLY
 10" STROKE, 5/8" P&G



02/01/07 SCALE: B 1:5

DRAWN BY: RFB

ENG: SPL CHK:

A850-VC-022

SHEET: 1 OF 1

X:\PVA\A850\VC-022i

B-ENG

Any designs or drawings produced by Navtec Inc. and transmitted to a second party are the property of Navtec Inc. and are to be considered confidential and are to be used only for the purpose for which they were transmitted.