


MAXIMUM PULL FORCE = 2,410 LBS [1,094 KG] @ 5,000 PSI
STROKE: 9.0 IN [229 MM]
RETURN FORCE: 473 LBS [215 KG]
MINIMUM AVAILABLE PCLC: 46 IN [1,168 MM]
MAXIMUM AVAILABLE PCLC: 60 IN [1,524 MM]

TOLERANCES: 0.XX = ±0.010"
 0.XXX = ±0.005"
 FRACTIONS = ±1/64"
 ANGLES = ±1/2°

REVISIONS				CHK INIT.
DATE	INIT.	#	ECO	

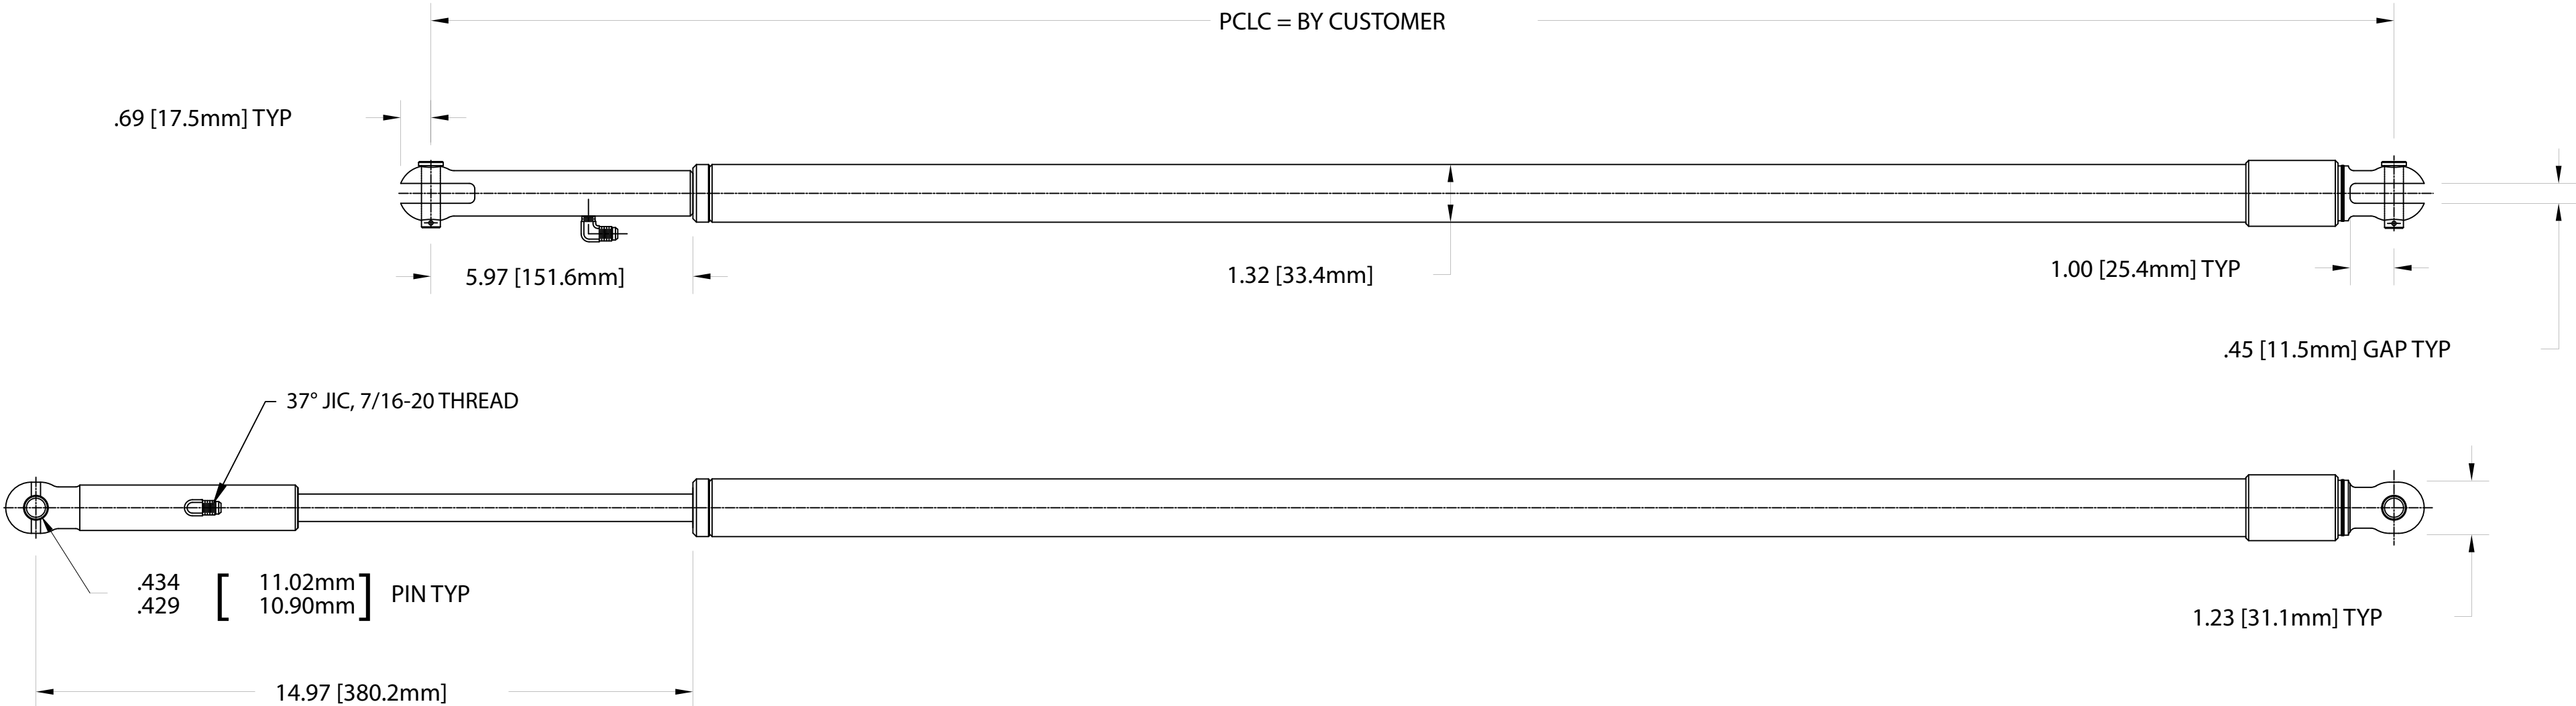

-6 VANG ASSEMBLY
9" STROKE, 7/16" P&G

NAVTEC[®]
HYDRAULICS

02/01/07

SCALE: B 1:4

DRAWN BY: RFB

ENG: SPL CHK:

SHEET: 1 OF 1

X:\P\A\A850\VC-006i

A850-VC-006

B-ENG

Any designs or drawings produced by Navtec Inc. and transmitted to a second party are the property of Navtec Inc. and are to be considered confidential and are to be used only for the purpose for which they were transmitted.